

TOMCARLINE

150W Single Output LED Driver

150H Series



## ■ Features:

- Universal AC input/Full rang 90-305VAC
- Built-in active PFC function
- Protections: Short circuit/Over current/Over voltage
- Cooling by free air convection
- Built-in 3 in 1 dimming function (1-10VDC or 10V PWM signal or resistance)
- Metal case, IP65 design for indoor or outdoor installations
- Suitable for outdoor LED street lighting, outdoor LED and moving sign applications
- Ultra-long life



150H-42 □ V: IP65Level,  $I_o$  adjustable through built-in potentiometer  
 D: IP65Level, 3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance),  $I_o$  adjustable through built-in potentiometer

## SPECIFICATION

Parameter Name	Min.	Typ.	Max.	Unit
Input Voltage	100	110;230	277	Vac
Input Current	---	0.6	3	A
Power Factor	0.95	0.98	0.99	PF
THD	5	8	20	%
Frequency Rang	47	50\60	63	Hz
Output no-load Voltage	43	46	48	Vdc
Output Serving Voltage	36	42	43	Vdc
Output Current	-3%	1.6 -3.6	+3%	Adc
Overshoot	---	---	10	%
Ripple & Noise	---	---	300	mV
No Load Power	---	0.5	2	W
Efficiency	88	91	---	% (230VA)
Over Current Protection	---	---	110	%
Short Circuit Protection	Constant Current limiting, recovers automatically after fault condition is removed			
Inrush Current(Typ.)	Cold Start 65A(twidth=595us measured at 50% Ipeak)at 230VAC			
MAX. No. of PSUs on 16A Circuit Breaker	4 units (circuit breaker of type B)/7 units (circuit breaker of type C) at 230VAC			

## WORKING ENVIRONMENT

Item	Min.	Typ.	Max.	Unit
Working Temp.	-40~+70℃ (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)			
IP Rating	IP65			
MAX. Working Humidity	20~95%RH non-condensing			
Cooling Method	Cooling by free air convection, External LED Driver can improve the lifespan.			
Storage Temp. , Humidity	-40~+80℃, 10~95%RH			
Working Atmosphere	70	---	106	Kpa

## SAFETY

Item	Min.	Typ.	Max.	Unit
I/P-O/P	3750	---	---	V(AC)
I/P-FG	2000	---	---	V(AC)
O/P-FG	500	---	---	V(DC)
Surge: L-N	2000	---	---	V
Surge :L,N-FG	4000	---	---	V




## OTHER

MTBF	≥196.6Khrs	MIL-HDBK-217F (25℃)
------	------------	---------------------



## 150H Series

※ V-Type:( 150H- 42V)




**TOMCARLINE**

150W Single Output LED Driver

**150H Series**

## DIMMING OPERATION

AC/L Black  
Or Brown  
AC/N White  
Or Blue  
FG Green  
Or Green/Yellow

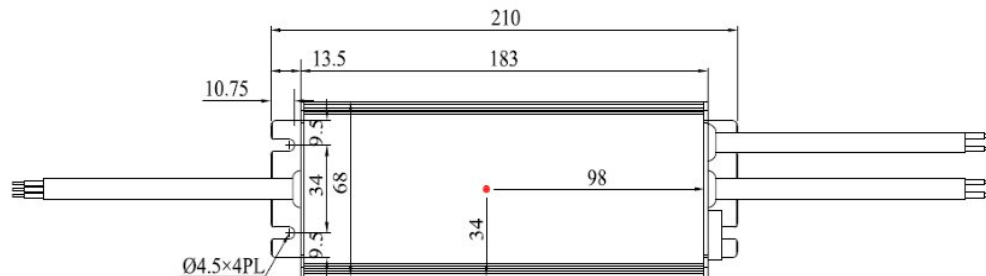


DIM+ Blue  
Or Brown  
DIM- White  
Or Blue  
+V Red  
Or Brown  
-V Black  
Or Blue


### ※ 3 in 1 dimming function(for D-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 1~10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100uA (typ.).


### ◎ Applying additive 1~10VDC

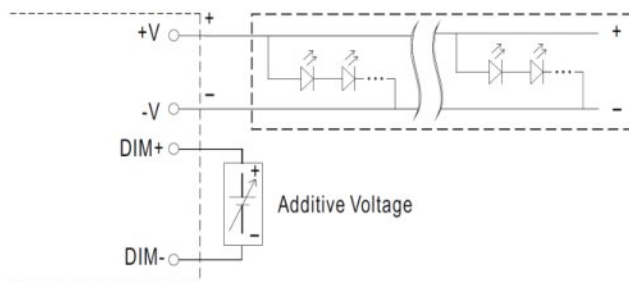


DO NOT connect "DIM- to V-"

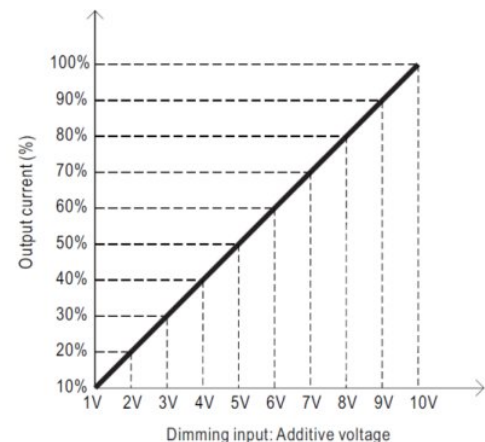

### ◎ Applying additive 10V PWM signal(frequency rang 100Hz~3KHz)

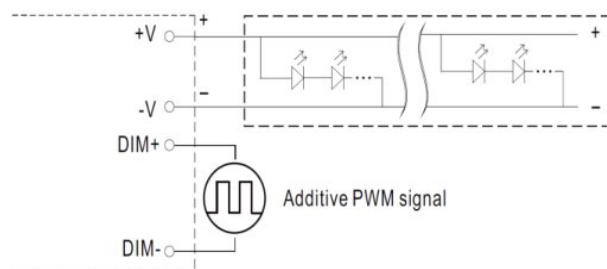

DO NOT connect "DIM- to V-"


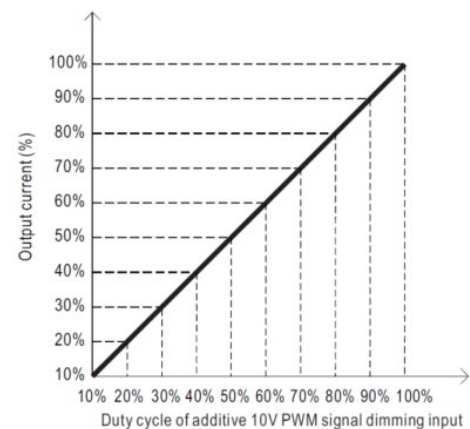


**TOMCARLINE**

150W Single Output LED Driver


**150H Series**

© Applying additive resistance:

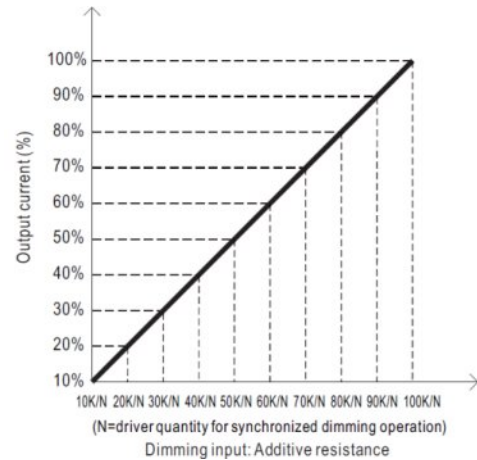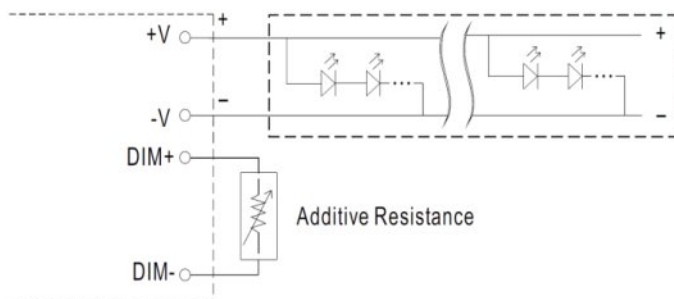

DO NOT connect "DIM- to V-"

Note: In the case of turning the lighting fixture down to 0% brightness , please refer to the configuration as follow:

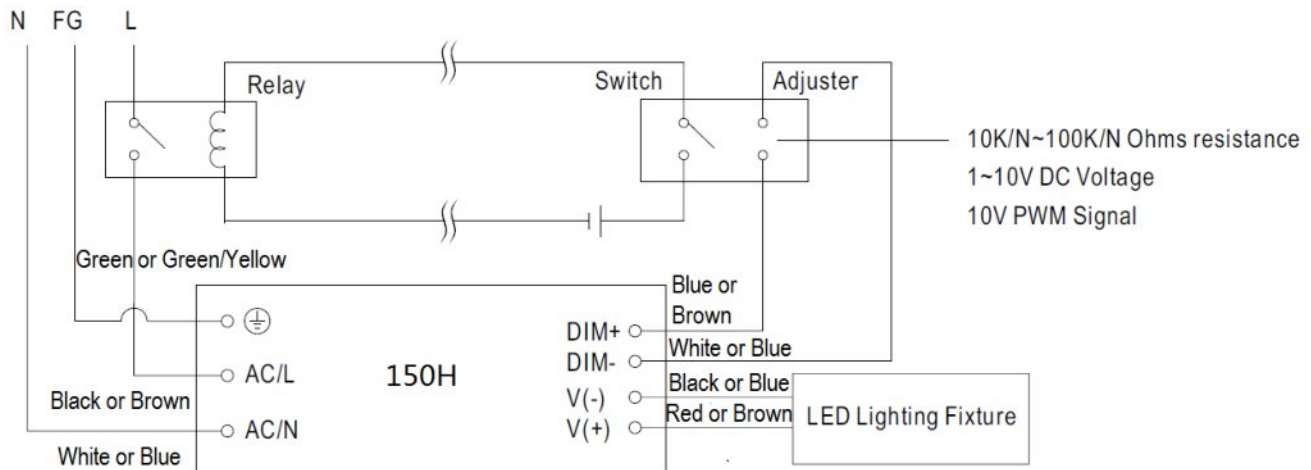


※ Using a switch and relay can turn ON/OFF the lighting fixture.

**TOMCARLINE**


150W Single Output LED Driver

**150H Series**


## BLOCK DIAGRAM

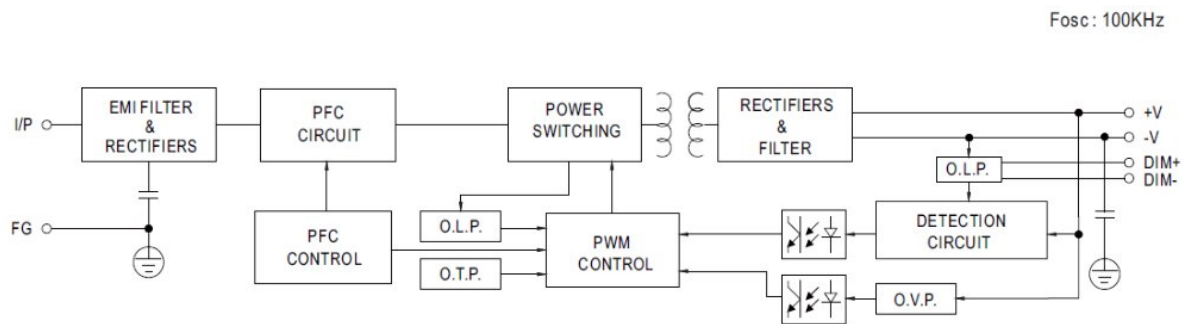

## OUTPUT LOAD vs TEMPERATURE

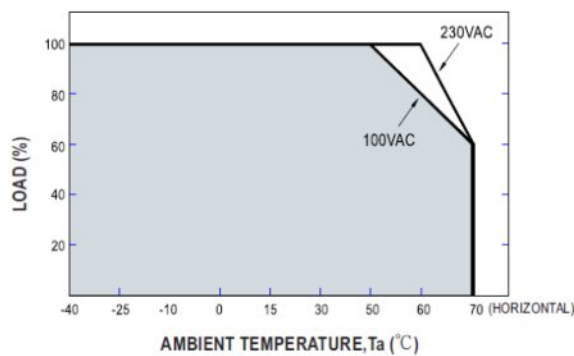


## STATIC CHARACTERISTICS

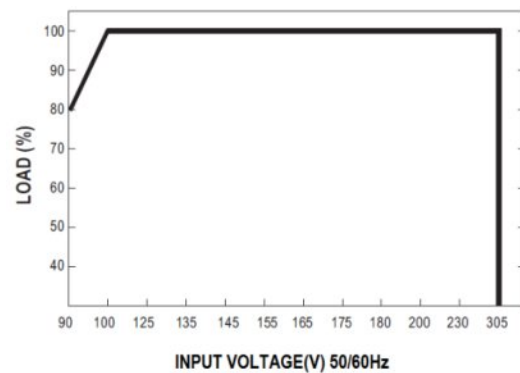

※ De-rating is needed under low input voltage.

## LIFETIME

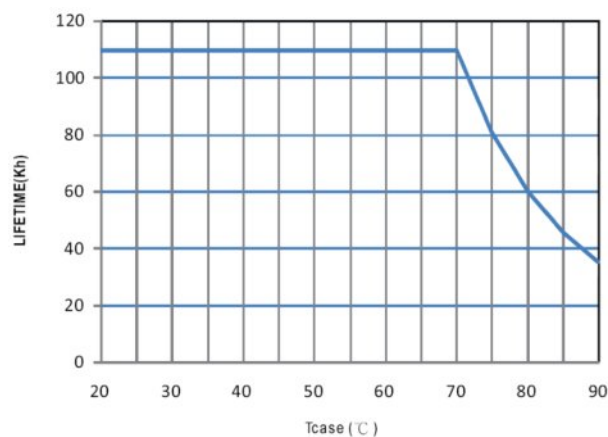


**TOMCARLINE**

150W Single Output LED Driver


**150H Series**

## POWER FACTOR (PF) CHARACTERISTIC

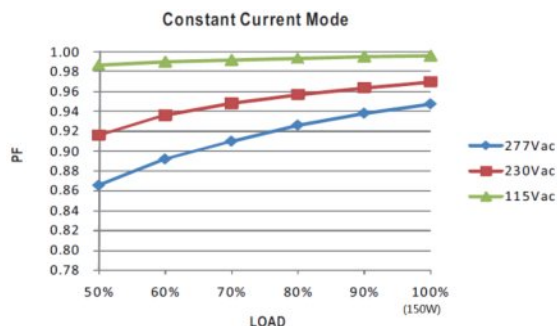

## EFFICIENCY vs LOAD

150H series possess superior working efficiency that up to 91% Can be reached in field applications.

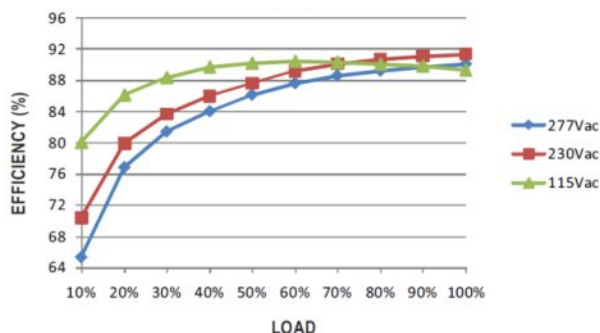

## DRIVING METHODS OF LED MODULE

- ※ This series is able to work in either Constant Current mode(a direct drive way) or Constant Voltage mode (usually through additional DC/DC drive) to drive the LEDs.

